

Offer 2023



AGRO  [®]
MASZ
Modern Farming



AGRO-MASZ company, with registered office in Strzelce Male, since its foundation in 2006 is growing very fast increasing employment and production every year. This is undoubtedly the effect of continuous improvement of the quality of AGRO-MASZ products stimulated by investments in the development of the production base and growing qualifications of company staff.

AGRO-MASZ tries to give the rhythm to the changes that are happening in agricultural sector introducing solid and modern machines on the market. Company focuses on innovative technologies and precision in steel processing to produce high quality products.



AGRO-MASZ constantly aims to improve the quality of products and systematically implements the production of new types of agricultural machinery to offer the most comprehensive offer for farmers. Company also puts strong emphasis on its presence on foreign markets.

AGRO-MASZ is taking new challenges and new projects to create wide and modern offer of agricultural machinery. Firm focuses on customer service to fulfill all clients' needs. This is base for today's functioning and future development of AGRO-MASZ company.



Table of Contents:



Subsoiler

page 4, 5



Subsoiler

page 5



Mulchharrow, aggregate for grasslandy

page 6



Disc cultivator

page 7



Disc harrow

page 8 - 13




Cultivators

page 14- 16



Cultivation and sowing

page 16

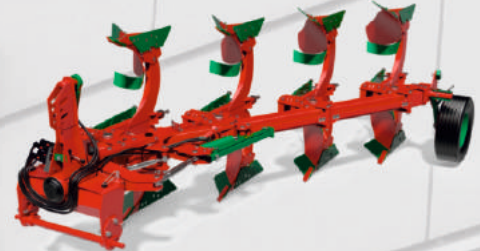

Ploughs

page 17 - 24



Stubble cultivators

page 25 - 31



Lime and fertiliser spreader

page 31



Seeders

page 32 - 40



Rollers


page 42

We reserve the right to changes in the offer and changes in the technical specifications machines without prior notification.
The appearance of the machines may differ from the one shown in the folder.

DURO I Subsoiler

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- frame system - letter „I”
- tines with replaceable working parts
- fluent adjustment of working depth
- underframe clearance 90 cm
- shear bolt protection
- supporting racks

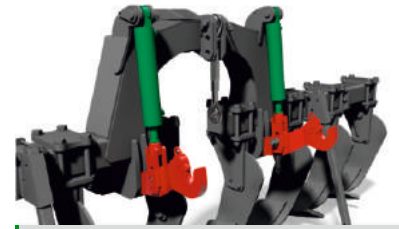

hydraulift 2 and 3 cat



supporting wheels

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	tooth spacing (cm)	Working depth max (cm)
DURO I 30	2.9	900	130	4	2.32	75	55
DURO I 30	2.9	1000	180	6	2.32	46 - 50	
DURO I 35	3.5	1050	180	6	2.8	60 - 71	
DURO I 40	4.0	1100	180	6	3.2	65 - 71	
DURO I 40	4.0	1200	200	8	3.2	50	

The weight of the machine depends of the equipment

DURO V Subsoiler

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- frame system - letter „V”
- tines with replaceable working parts
- fluent adjustment of working depth
- supporting wheels 10.0/80-12
- underframe clearance 90 cm
- shear bolt protection



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Distance between tines(cm)	Working depth max (cm)
DURO 30	3.07	1480	160	4	2.4	76	55
DURO 30	2.76	1580	180	6	2.2	46	
DURO 40	3.68	1680	200	8	2.8	46	

The weight of the machine depends of the equipment

DURO LIGHT cultivator

A - machine base

- tines with replaceable working parts
- working parts for shallow work 80 mm with wings
- spring protection
- interbody clearance 62 cm
- underframe clearance 85

B1 - mandatory equipment

C - options



hydrolift 2 and 3 cat

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of legs (pcs.)	Performance (ha/h)	Working depth max (cm)
DURO L 30	3.0	670	100 - 200	5	2.4	25
DURO L 40	4.0	810	140 - 280	7	3.2	25

** The weight of the machine depends of the equipment.

PD Chisel plough

A - machine base

- tines with replaceable working parts
- adjustable side screens
- fluent adjustment of working depth
- 2 rows of legs with distance 89 cm
- shear bolt or hydraulic protection against stones
- underframe clearance 91
- double barbed roller 2 x 500 mm

B1 - mandatory equipment

C - options



lights

share bolt protection hydraulic protection

Model	Working width (M.)	Weight (kg)	Weight (kg)	Power demand (HP)	No. of legs (pcs.)	Performance (ha/h)	Working depth max (cm)
PD30	3.0	2173	2613	160 - 230	5	2.0 - 3.0	15 - 55
PD30	3.0	2345	2961	240 - 290	7	2.0 - 3.0	
PD40	4.0	3150	3550	310 - 370	9	3.0 - 4.0	

** The weight of the machine depends of the equipment.

share bolt protection

hydraulic protection



GRASS Aggregate for grassland

A - machine base	B1 - machine base	C - options
3 rows of springs with adjustable working angle	prismatic roller 450/500 mm	
hydraulic adjustment of working depth		hydraulic adjustment of leveling slat
supporting racks		
		set: loading platform, steps
		

Model	Szerokość (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
GRASS300	3.0	1400	100	30	2.0	5




** The weight of the machine depends of the equipment.

hydraulic adjustment of leveling slat

set: loading platform, steps

SP 230 aftercrop seeder

BM Mulch harrow

A - machine base	B1 - mandatory equipment	C - options
5 rows of tines ø16mm length 763 mm		
hydraulically regulated gradient of tines		row of hydraulically regulated discs 460 mm
hydraulic folding (automatic blockade for transport)		
		basic lights
		

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
BM30	3.0	635	50 - 70	50	6	8
BM45	4.5	1245	80 - 110	80	9	8
BM60	6.0	1900	100 - 140	100	12	8
BM75	7.5	2050	120 - 170	120	15	8
BM90	9.0	2700	150 - 210	150	18	8

** The weight of the machine depends of the equipment.

SP 230 aftercrop seeder

AT Disc cultivator

A - machine base	B1 - mandatory equipment	C - options
rubber safety protection 35 x 210 mm	roller (availability of rollers on the page 43)	 <p>hydraulic adjustment of working depth</p>
2 rows of discs 510 lub 560 type „P” or „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 70 cm		
side screens with adjustable height		
folding and adjustable side discs w AT27- 40		
hydrolift for seeder (1,5t)		



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
AT25	2.5	940	85 - 115	20	1.6 - 2.4	14
AT27	2.7	1040	90 - 120	22	1.8 - 2.6	
AT30	3.0	1200	100 - 130	24	2.0 - 3.0	
AT35	3.5	1385	105 - 145	28	2.4 - 3,6	
AT40	4.0	1570	110 - 150	32	2.8 - 4.2	

The weight of the machine depends of the equipment

ATO Trailed disc cultivator

A - machine base	B1 - mandatory equipment	C - options
rubber safety protection 35 x 210 mm		 <p>set of hydraulic row markers</p>
2 rows of discs 560 type „P” or „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 75 cm		
side screens with adjustable height		
hydrolift for seeder (1,5t)		
folding and adjustable side discs		
hydraulic adjustment of wheel roller		



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
ATO30	3.0	1880	100	24	2.0 - 3.0	14



The weight of the machine depends of the equipment




adapter connection with top-mounted seeder Sn300

BT Disc harrow for vineyards and orchards


A - machine base	B1 - mandatory equipment	C - options
rubber safety protection 35 x 180 mm	roller (availability of rollers on the page 43)	
single or double disc legs		
2 rows of discs 510 or 560 type „P” or „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 85 cm		
side screens with adjustable height		

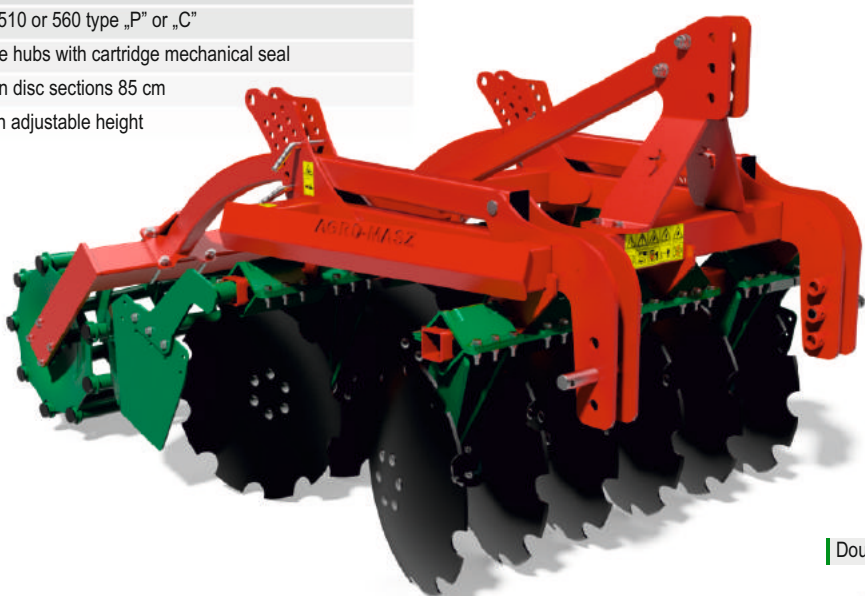
row of spring tines



basic lights



Double disc leg



Single disc leg



* Disc type „P” is not available with double holder

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
BT15	1.5	700	50	12	1.0 - 1.5	14
BT17	1.75	780	60	14	1.1 - 1.7	
BT20	2.0	825	70	16	1.3 - 2.0	

The weight of the machine depends of the equipment

BTL Light disc harrow

A - machine base	B1 - mandatory equipment	C - options
automatic catch bar	roller (availability of rollers on the page 43)	
rubber safety protection 35 x 180 mm		
2 rows of discs 510 or 560 type „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 72 cm		
side screens with adjustable height		
double disc legs		

hydraulic adjustment of working depth

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
BTL30	3.0	1120	100 - 130	24	2.0 - 3.2	14

The weight of the machine depends of the equipment

COLT Trailed disc harrow

A - machine base	B1 - mandatory equipment	C - options
hydraulic adjustment of working depth	roller (availability of rollers on the page 43)	
rubber safety protection 35 x 180 mm		
2 rows of discs 510 or 560 type „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 85 cm		
side discs with adjustable height		
double disc legs		
wheels 10/80-12		




Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
COLT30	3.0	1460	100	24	2.0 - 3.2	14

The weight of the machine depends of the equipment

TROL Disc Harrow

A - machine base	B1 - mandatory equipment	C - options
automatic catch bar	roller (availability of rollers on the page 43)	
rubber safety protection 35 x 210 mm		
2 rows of discs 560 type „P” or „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 100 cm		
absorber side screens		
hydraulic adjustment of working depth		

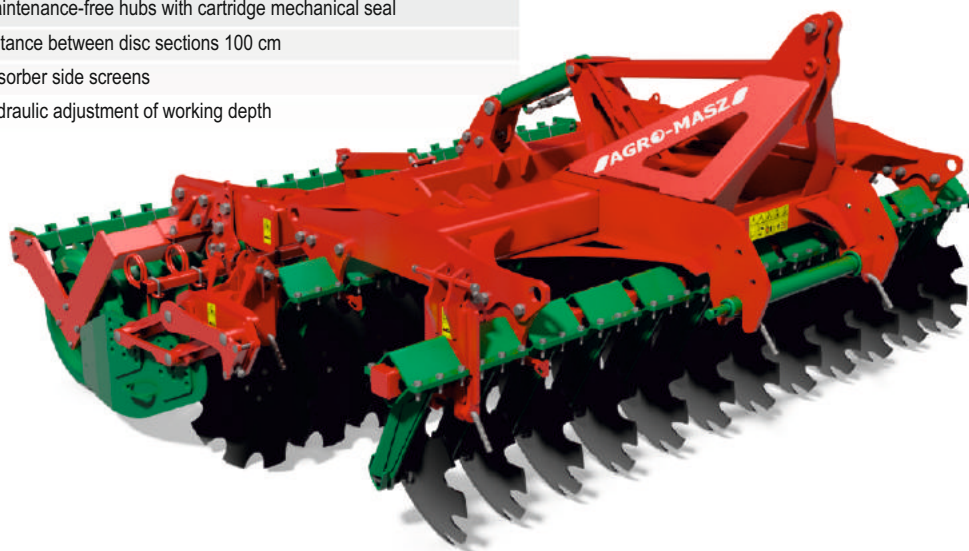

row of spring tines






basic lights

discs type "C" 560mm thicknes 6mm
maintenance-free SKF hubs (only for disc type "C" 560 mm)

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
TROL30	3.0	1810	100-160	24	3	14
TROL35	3.5	2020	120 -180	28	3.5	14
TROL40	4.0	2250	140 - 200	32	4	14

The weight of the machine depends of the equipment

BT Disc harrow


A - machine base	B1 - mandatory equipment (BTH40-60)	C - options
rubber safety protection 35 x 210 mm or spring protection 90 x 13 mm (disc 510 type „C“)	drawbar CAT. 3 Type "I", 2 i 3 Type "U", 4 Type "U"	
2 rows of discs 560 type „P“ or „C“	B2 - mandatory equipment	
maintenance-free hubs with cartridge mechanical	trailed version for BTH 2018 with drawbar ,wheel 400/60 R15,5 without spindle	row of spring tines
distance between disc sections 85 cm or 100 cm	trailed version for BTH 2018 with drawbar ,wheel 500/50 R17, without spindle	
side discs with adjustable height	B3 - mandatory equipment	
folding and adjustable side discs BT30 and Bt40	Hitch fi 40 (110 x 100)	hydraulic adjustment of working depth
hydraulic folding (BT40H, BT50H, BT60H)	Hitch fi 50 (110 x 100)	
	Hitch cat. 3 typ "I"	
	Hitch cat. 2 i 3 typ "U"	
	Hitch cat. 4 typ "U"	



hydraulic adjustment of working depth



10.0/75 R15.3 (only for trailed version 2018)

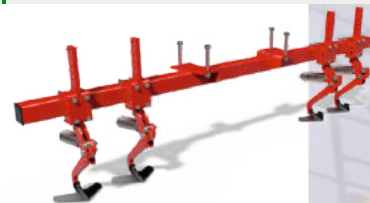

set of 4 pcs. cultivators with spring protection



basic lights (BT27 - BT 40)

lights with adjustable handle

lights with fenders for trailed version



platform with steps for SP230 (only for trailed version)

maintenance-free SKF hubs (only for disc type "C" 560 mm)

discs type "C" 560mm thickness 6mm

hot galvanized frame

*Parameters listed in the table does not take into account the weight and dimensions of the trailed version

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
BT25	2.5	1180	85 - 115	20	1.5 - 3	14
BT27	2.7	1180	90 - 120	22	1.89 - 3.24	
BT30	3.0	1320	100 - 130	24	2.1 - 3.6	
BT35	3.5	1320	105 - 140	28	2.45 - 4.2	
BT40	4.0	1750	110 - 150	32	2.8 - 4.8	
BT40H	4.0	2250	120 - 150	32	2.8 - 4.8	
BT50	5.0	2100	130 - 180	40	3.5 - 6.0	
BT50H	5.0	2600	140 - 180	40	3.5 - 6.0	
BT60H	6.0	3100	160 - 200	48	4.2 - 7.2	

** The weight of the machine depends of the equipment.

FASTER CUT Disc harrow for shallow cultivation

NEW!

A - machine base
two rows of discs type "Faster"
rubber shock absorbers 35 x 210 mm
maintenance-free hubs with cartridge seal
distance between the rows of discs 85
side screens
mechanical adjustment of the working depth of the second row of discs in relation to the first row

B1 - mandatory equipment
lower hitch cat. 3. type "I"

B2 - mandatory equipment
mechanical adjustment of working depth

B3 - mandatory equipment
rubber roller with a cleaner (Ø560 mm) version 2020

C - options



380 mm front cutting roller with hydraulically adjustable working depth



additional weights

double scraper behind the roller with regulation of the angle (to rubber roller)

holder for Sp230

loading platform, stairs to Sp230

lights version 2022



Model	Width (M.)	Weight (kg)	Power (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
FASTER CUT 30	3.0	2260	130	24	5.4	4

** The weight of the machine depends of the equipment.

FASTER Disc harrow for shallow cultivation

NEW!

A - machine base
rubber shock absorbers 35 x 210 mm
two rows of discs type "Faster"
maintenance-free hubs with cartridge seal
distance between the rows of discs 100 cm
side screens

B1 - mandatory equipment
roller (availability of rollers on the page 43)

C - options



Lights (main handle + lights 2018 version for BTH)



holder for SP230 + platform with folding steps (only for lifted version)

lights version 2022

assembly platform for Sp230

Harrow (between second row of discs and a

Hydraulic adjustment of working depth (2018 version for BTH)



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
FASTER40H	4.0	2150	100-160	32	2.8 - 4.8	4
FASTER50H	5.0	2500	120 -180	40	3.5 - 6.0	4
FASTER60H	6.0	3000	140 - 200	48	4.2 - 7.2	4

** The weight of the machine depends of the equipment.

BTC Heavy disc harrow

A - machine base	B1 - mandatory equipment	C - options
rubber safety protection 40 x 210 mm	roller (availability of rollers on the page 43)	
2 rows of discs 560 or 620 type „C”		
maintenance-free hubs with cartridge mechanical seal		
distance between disc sections 100 cm		
folding and adjustable side discs		
side screens with adjustable height		



hydraulic adjustment of working depth



basic lights



lights with adjustable handle

maintenance-free SKF hubs (only for disc type "C" 560 mm)

discs type "C" 560 mm thickness 6 mm

row of tines (between second row of discs and roller)

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
BTC30	3.0	1900	120 - 150	24	2.0 - 3.0	14
BTC40	4.0	2400	130-160	32	2.8 - 4.8	14
BTC50	5.0	2900	160-200	40	3.5 - 6.0	14
BTC60	6.0	3150	200-250	48	4.2 - 7.2	14

The weight of the machine depends of the equipment

BTC Heavy disc harrow (trailed)

A - machine base	B1 - mandatory equipment	C - options
rubber safety protection 40 x 210 mm	drawbar CAT. 3 Type „I”	
2 rows of discs 560 or 620 type „C”	drawbar CAT. 2, 3 Type „U”	
maintenance-free hubs with cartridge mechanical seal	drawbar CAT. 4 Type „U”	
distance between disc sections 100 cm		
side screens with adjustable height		
hydraulic adjustment of working depth		
axle's hydraulic amortization		
transport wheels 500/50-17		
guide wheels 10,0/80x12/10PR		
	B2 - mandatory equipment	
	pneumatic brakes	
	pneumatic-hydraulic brakes	
	B3 - mandatory equipment	
	roller (availability of rollers on the page 43)	



lights



row of spring tines mechanically or hydraulically adjustable



platform with steps for Sp230







set of 4 pcs. cultivators with spring protection and cultivator point 250mm

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
BTC50	5.0	4680	180 - 220	40	4.0 - 6.0	14
BTC60	6.0	5200	220 - 260	48	5.0 - 7.0	14

The weight of the machine depends of the equipment

TIGER Heavy disc harrow semi-mounted




A - machine base	B1 - mandatory equipment	C - options
rubber protection 40 x 210 mm	ear fi 50	
SKF hubs		
hydraulically foldable	B2 - mandatory equipment	
distance between rows of discs 100 cm	basic hydraulic system (folding of the machine, gradual adjustment of the working depth on the rollers and on the copying wheels)	
adjustable disc side screens	B3 - mandatory equipment	
set of copying wheels 4 x 300 / 55 R14,5	pneumatic brakes with hand brake	
transport wheels 500 / 60 R22,5	B4 - mandatory equipment	
supporting foot	tandem C-ring roller (2 x 500 mm) 2020 version	
2 rows of carbon discs sharpened 515 mm or 560 x 6 type "C"		



Model	Width (M.)	Weight (kg)	Power (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
TIGER 8	8.0	8500	270 - 330	64	9.6 - 12	14
TIGER 10	10.0	9500	330 - 400	80	12 - 15	14

**Weight depends on equipment.

STRIX Weeder between rows

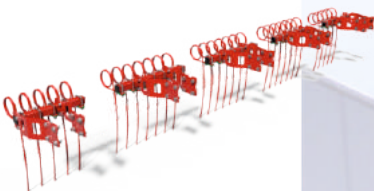
A - machine base	B1 - mandatory equipment	C - options
coulter constructed on the parallelogram basis		
copying wheel 300 x 100 mm		
tines 32 x 12 with coulter 150 mm		
gradually adjustable coulter pressure		
supporting feet		
distance between rows 70,75,80 cm		 <p>fertiliser spreading system</p>
		 <p>set of spring harrows 12 mm</p>

Model	Width (M.)	Weight (kg)	Power (HP)	No. of sections (pcs.)	Performance (ha/h)	Working depth max (cm)
STRIX 5	3.5 - 4	950	90 - 120	5	2.4	10

** Weight depends on equipment.

AUC Heavy duty cultivator

NEW!

A - machine base	B1 - mandatory equipment (AUCH)	C - options
leveling slat I toothed with adjustable working width an spring	drawbar CAT.3 Type "I", CAT.2 i 3 Type "U", CAT.4 Type "U"	
cage roller 400 mm		
2 rows of spring tines 25 x 25 mm with cultivator point		
levelling bar II (for version with 25 x 25 tooth)		
side screens		
	B2 - mandatory equipment (AUCH)	
	railed version for BTH 2018 with drawbar ,wheel 400/60 R15,5 without spindle or wheel 500/50 R17, without spindle	
	B3 - mandatory equipment	
	roller (availability of rollers on the page 43)	<p>basic lights (AUC30)</p> <p>lights with adjustable handle (AUC40)</p>




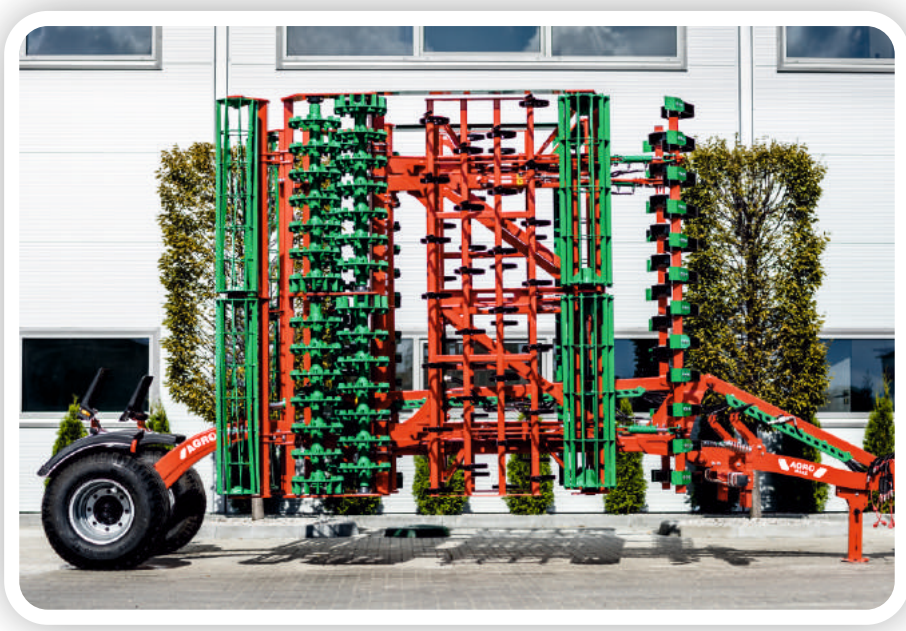
Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AUC30	3.0	1540	100 - 140	12 / 24	1.8 - 2.7	18
AUC40H	4.0	2250	140 - 190	16 / 36	2.6 - 3.8	
AUC50H	5.0	2650	175 - 225	20 / 44	3.0 - 4.5	

** The weight of the machine depends of the equipment

AUC HEAVY CULTIVATOR - TRAILED

NEW!

A - machine base	B1 - mandatory equipment	C - options
front cage roller 400 mm	hitch spindle cat.3 type "I", cat.3 type "I", cat. 4 type "U", cat. 3 and 4 type "U"	 <p>Lights with fenders for trailed</p>
road wheels 500/50 R17	B2 - mandatory equipment	
two rows of spring tines 25x25 mm with duckfoot four rows or of spring tines 32x12 mm with a straight coupler	mechanical	
iclearing bar II (for the version with 25 x 25 teeth)	B3 - mandatory equipment	
side screens	Single crosskill roller Ø 400m	
	Double crosskill roller Ø 400mm	



Set of 4 tractor trace cultivators with spring

D1 - additional front levelling tool



front flat levelling bar regulated mechanically



front harrow hydraulically adjustable with 80x10mm springs

D2 - additional rear levelling tool



levelling bar behind crosskill roller



cage roller Ø 320mm behind crosskill roller

Model	Working width (m)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AUC40H	4.0	4150	140 - 190	16 / 36	2.6 - 3.8	18
AUC50H	5.0	4700	175 - 225	20 / 44	3.0 - 4.5	
AUC60H	6.0	5200	210 - 260	24 / 52	3.6 - 5.4	

** The weight of the machine depends of the equipment

AU Cultivating aggregate

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- automatic catch bar
- tractor trace cultivators with adjustment of working depth and width
- front cage roller
- 4 rows of tines 32 x 12 mm or 45 x 10 mm
- 2 rows of toothed cage rear rollers



additional tractor trace cultivator



basic lights



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AU36	3.6	1080	85 - 95	36	2.0 - 4.0	4 - 13
AU42	4.2	1180	95 - 115	42	2.9 - 5.0	
AU50	5.0	1560	110 - 140	50	3.5 - 6.1	
AU56	5.6	1660	120 - 160	56	4.1 - 7.2	


The weight of the machine depends of the equipment

AS Cultivating and sowing aggregate

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- automatic catch bar
- front cage roller smooth
- 2 or 3 rows of tines 32 x 12 mm type "P."
- hydrolift for seeder (1 t)
- adjustable rack for seed drill

roller (availability of rollers on the page 43)

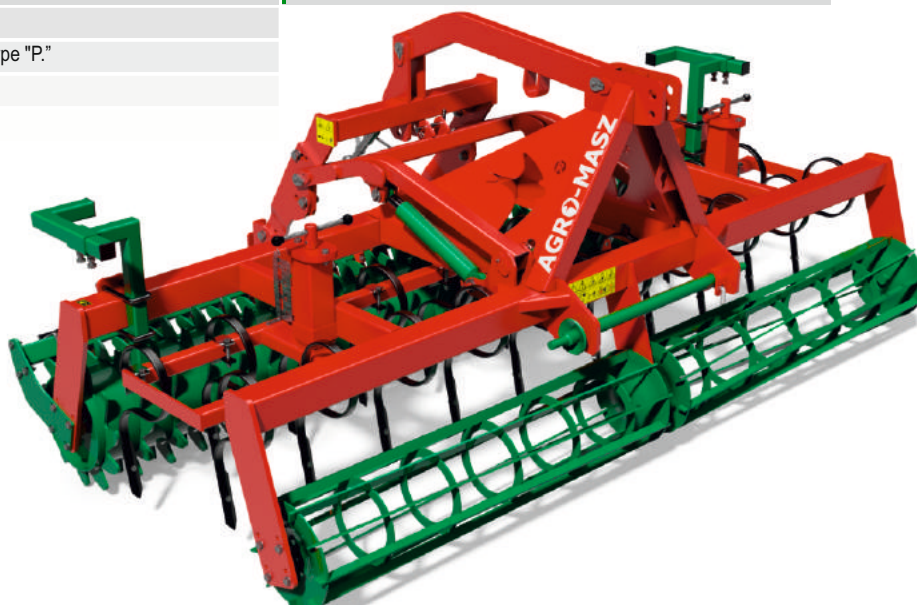


** "S" tines are only available when selecting the rear string roller Ø 320 mm

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AS25	2.5	660	60 - 70	16	1.5 - 2.0	4 - 13
AS27	2.7	680	70 - 90	18	1.8 - 2.6	
AS3	3.0	740	80 - 100	20	2.0 - 3.0	
AS4	4.0	900	110 - 140	26	2.8 - 4.2	

The weight of the machine depends of the equipment

HESTILE Cambridge roller

A - machine base	B1 - mandatory equipment	C - options
3 sections	hitch- type Fi40	
hydraulically foldable	ball-type K80	
supporting racks	swinging hitch to choose from: cat. 2 type „I“, cat. 3 type „I“, cat. 2 + 3 type „U“ or cat. 4 type „U“	
support foot		
wheels 400/60x15,3		
	B2 - mandatory equipment	
	roller (availability of rollers on the page 43)	



set of containers for stones



front spring 80x10 leveling slat (hydraulic adjustment)




lights version 2022

Model	Working width (M.)	Weight (Kg)	Power demand (HP)	Performance (ha/h)
HESTILE 45	4.5	4000	90 - 110	4.5 - 6.75
HESTILE 54	5.4	4300	100 - 120	5.4 - 8.1
HESTILE 63	6.3	4600	110 - 150	6.3 - 9.45

** The weight of the machine depends of the equipmen.

POVC Reversible heavy plough vario

A - machine base	B1 - mandatory equipment	C - options
all working parts made from hardened boron steel	TYPE I (reversing cylinder with memory chip + straightening	
cast iron turntable		
working width: 30 - 50 cm	B2 - mandatory equipment	
frame-profil: 200 x 150 x 10 mm	side wheel + cushioning system (transport and depth circle) 380/55-17	
interbody clearance: 105 cm		
underframe clearance: 90		
shear bolt protection against stones		

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
POVC3	1.05 - 1.50	1740	160	3	0.84 - 1.2	42
POVC4	1.40 - 2.00	1920	210	4	1.12 - 1.6	42
POVC5	1.75 - 2.50	2100	260	5	1.4 - 2.0	42

** The weight of the machine depends of the equipmen.

3 YEAR GUARANTEE
for frame of all reversible ploughs!!!

GIANT Reversible plough (trailed) VARIO

A - machine base

- all working parts made from hardened boron steel
- furrow closed-work, furrow open-
- mechanical working width adjustment: 35 - 50 cm
- frame-profil: 160 x 160 mm
- interbody clearance 100 cm
- underframe clearance 76
- in standard plough shares 18" with
- hydraulic adjustment of first furrow

B1 - mandatory equipment

C - options



extension for furrow (2 pcs.)



share knife



skimmers



share bolt protect spring protect

Model	Working width (M.)	Weight (kg)	Weight (kg)	Weight (kg)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
GIANT 7	2.45 - 3.5	4500	4700	210	7	1.96 - 2.8	30
GIANT 8	2.8 - 4.0	4700	5000	240	8	2.24 - 3.2	30

GIANT ON LAND Reversible plough (trailed) VARIO

NEW!

A - machine base

- all working parts made from hardened boron steel
- furrow closed-work, furrow open-
- mechanical working width adjustment: 35 - 50 cm
- frame-profil: 160 x 160
- interbody clearance 100 cm
- underframe clearance 76
- in standard plough shares 18" with
- hydraulic adjustment of first furrow

B1 - mandatory equipment

C - options




extension for furrow (2 pcs.)



share knife



skimmers

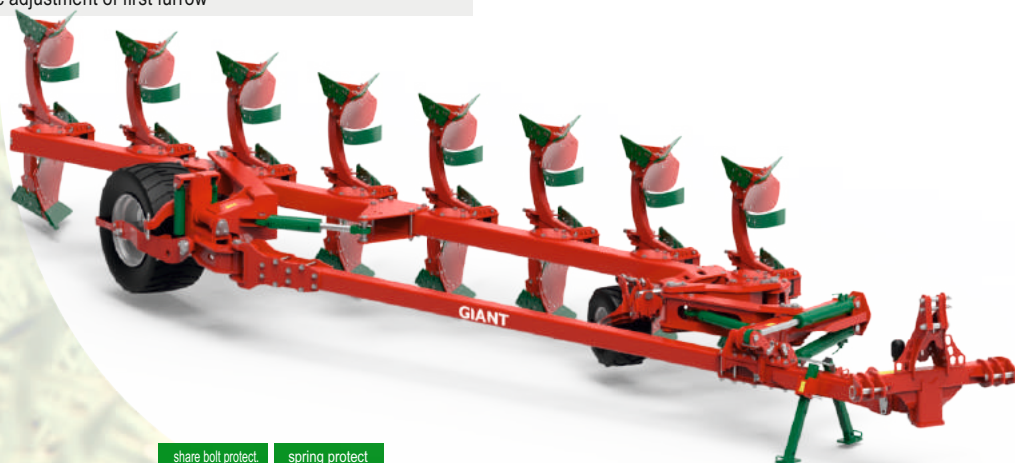

share bolt protect. spring protect

Model	Working width (M.)	Weight (kg)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
GIANT 7	2.45 - 3.5	4800	5000	250	7	1.96 - 2.8	30
GIANT 8	2.8 - 4.0	5000	5300	280	8	2.24 - 3.2	30

POV Reversible plough Vario

3 YEAR GUARANTEE
for frame of all reversible ploughs!!!

A - machine base	B1 - mandatory equipment
all working parts made from hardened boron steel	TYPE I (reversing cylinder, working width adjustment cylinder)
standard main shaft or cast iron main shaft	TYPE II (reversing cylinder with memory chip, working width adjustment cylinder with memory chip)
furrow closed-work, furrow open-work or XL	B2 - mandatory equipment
fluid working width adjustment: 35 - 50 cm	rear wheel (transport and depth wheel) 10.0/80 R12
frame-profil: 140 x 140 mm	rear wheel (transport and depth wheel) 26x12.00-12
interbody clearance: 100 cm	side double wheel (depth wheel)
underframe clearance: 76 cm	rear wheel + shock-absorption system (transport and depth wheel) 10.0/80 R12
in standard plough shares 18" with cutters	rear wheel + shock-absorption system (transport and depth wheel) 26x12.00-12
adjustable catch bar	

C - options




extension for furrow (2 pcs.)



share knife



skimmers

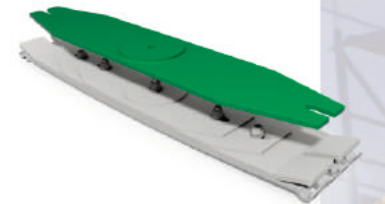

strengthened spring protection (+2 feathers)



disc coupler for plough with spring protection



shear bolt protection against stones




spring protection (5 springs)



furrow closed-work



furrow open-work

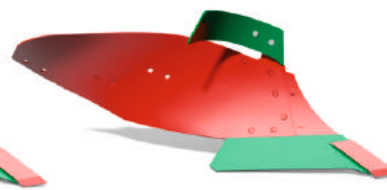

furrow XL type







share bolt protect. spring protect.

Model	Working width (M.)	Weight (kg)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
POV3	0.6 - 1.5	1100	1300	90 - 120	3	0.8 - 1.3	30
POV4	0.8 - 2.0	1350	1550	120 - 140	4	1.0 - 1.7	
POV5	1.0 - 2.5	1600	1800	140 - 180	5	1.2 - 2.0	

The weight of the machine depends of the equipment

PO Reversible plough

3 YEAR GUARANTEE
for frame of all reversible ploughs!!!

A - machine base	B1 - mandatory equipment (PO85)	C - options
all working parts made from hardened boron steel	TYPE I (reversing cylinder)	
standard main shaft or cast iron main shaft	TYPE II (reversing cylinder + straightening cylinder)	
furrow closed-work, furrow open-work or XL	TYPE III (reversing cylinder with memory chip + straightening cylinder)	
underframe clearance: 76 cm	B1 - mandatory equipment (PO100)	
frame-profil: 140x140 mm	TYPE I (reversing cylinder)	
in standard plough shares 18" with cutters	TYPE II (reversing cylinder with memory chip)	
working width: 35, 40, 45, 50 cm	B2 - mandatory equipment	
adjustable catch bar	rear wheel (transport and depth wheel) 10.0/80 R12	
straightening cylinder (for version with interbody clearance 100 cm)	rear wheel (transport and depth wheel) 26x12.00-12	
interbody clearance 85 cm or 100 cm	side wheel (transport and depth wheel) 10.0/80 R12	
	side wheel (transport and depth wheel) 26x12.00-12	
	side double wheel (depth wheel)	
	rear wheel + shock-absorption system (transport and depth wheel) 10.0/80 R12	
	rear wheel + shock-absorption system (transport and depth wheel) 26x12.00-12	

disc couler



extension for furrow (2 pcs.)




share knife




cultivating roller holder




skimmers

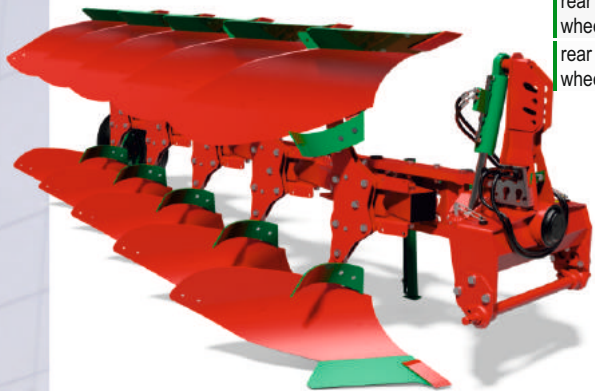

shear bolt protection against stones

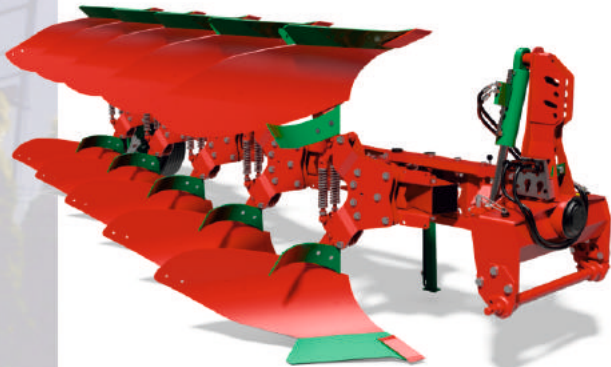

semi-automatic protection against stones

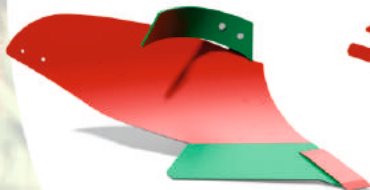

furrow closed-work



furrow open-work









furrow XL type


Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
PO3	1.05 - 1.50	1050	80 -115	3	0.8 - 1.3	30
PO4	1.40 - 2.00	1300	115 - 140	4 or 3+1	1.0 - 1.7	
PO5	1.75 - 2.50	1550	130 - 180	5 or 4+1	1.2 - 2.0	

The weight of the machine depends of the equipment


PO Reversible plough

3 YEAR GUARANTEE
for frame of all reversible ploughs!!!

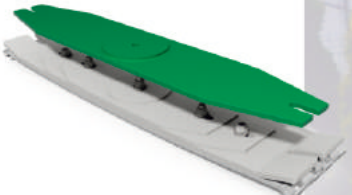
A - machine base	B1 - mandatory equipment (PO100)	C - options
all working parts made from hardened boron steel	TYPE I (reversing cylinder)	 <p>disc couler</p>  <p>extension for furrow (2 pcs.)</p>  <p>share knife</p>  <p>cultivating roller holder</p>  <p>strengthened spring protection (+2 feathers)</p>  <p>skimmers</p>
standard main shaft or cast iron main shaft	TYPE II (reversing cylinder with memory chip)	
furrow closed-work, furrow open-work or XL	B2 - mandatory equipment	
underframe clearance: 76 cm	rear wheel (transport and depth wheel) 10.0/80 R12	
frame-profil: 140x140 mm	rear wheel (transport and depth wheel) 26x12.00-12	
in standard plough shares 18" with cutters	side wheel (transport and depth wheel) 10.0/80 R12	
working width: 35, 40, 45, 50 cm	side wheel (transport and depth wheel) 26x12.00-12	
adjustable catch bar	side double wheel (depth wheel)	
interbody clearance: 100 cm	rear wheel + shock-absorption system (transport and depth wheel) 10.0/80 R12	
straightening cylinder	rear wheel + shock-absorption system (transport and depth wheel) 26x12.00-12	

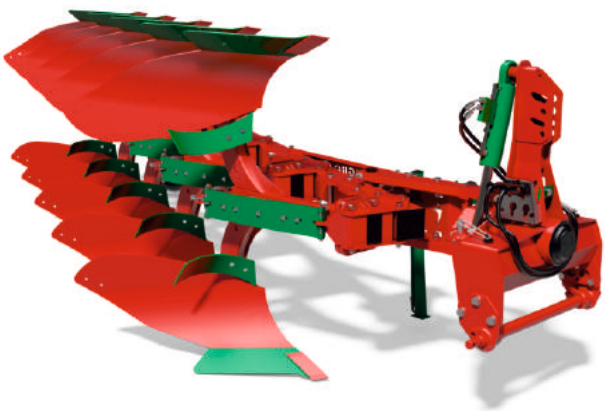

spring protection (5 springs)

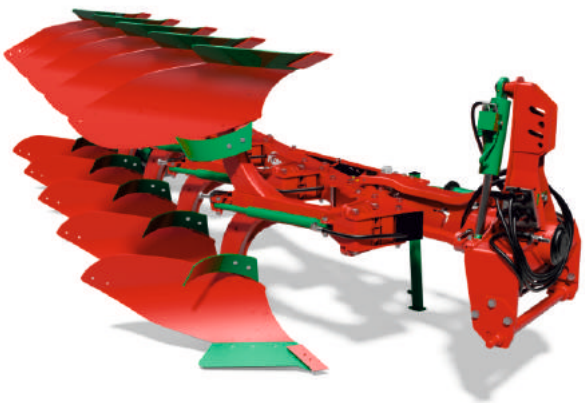

hydraulic protection

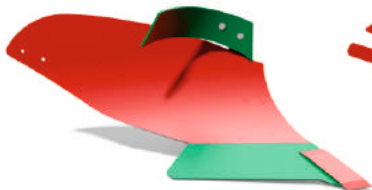

furrow closed-work



furrow open-work



furrow XL type


Model	Working width (M.)	Weight (kg)	Power demand (HP)	Ino. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
PO3	1.05 - 1.50	1250	80 - 115	3	0.8 - 1.3	30
PO4	1.40 - 2.00	1500	115 - 140	4 or 3+1	1.0 - 1.7	
PO5	1.75 - 2.50	1740	130 - 180	5 or 4+1	1.2 - 2.0	





The weight of the machine depends of the equipment

3 YEAR GUARANTEE
for frame of all reversible ploughs!!

FRONT Reversible FRONT plough

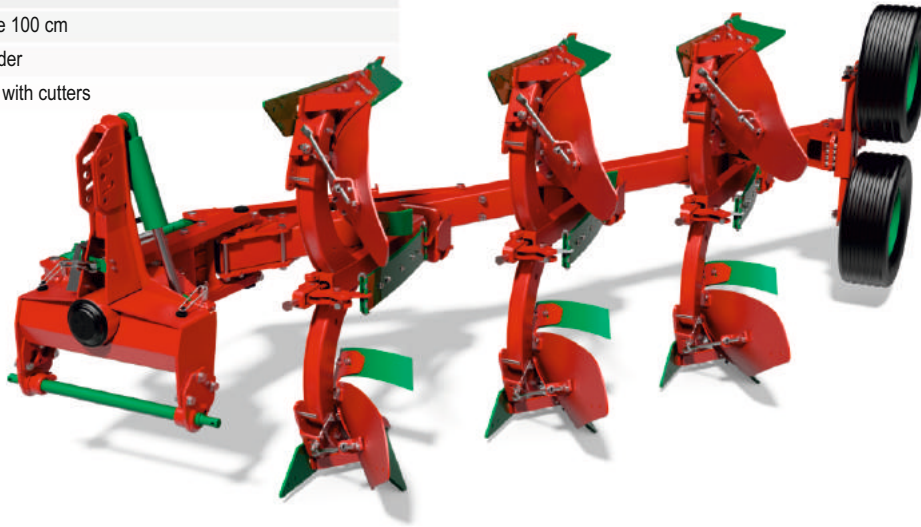A - machine base	B1 - mandatory equipment
all working parts made from hardened boron steel	TYPE II (reversing cylinder with memory chip)
shear bolt protection or spring protection against stones	B2 - mandatory equipment
working width: 35, 40, 45, 50 cm	depth wheel+ shock-absorption system 10.0/80 R12
furrow closed-work, furrow open-work or XL	depth wheel+ shock-absorption system 26x12.00-12
underframe clearance: 76 cm	
frame-profil: 140x140 mm	
interbody clearance 100 cm	
straightening cylinder	
plough shares 18" with cutters	

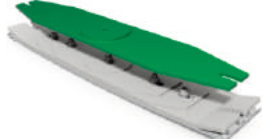

C - options

extension for furrow (2 pcs.)

share knife

strengthened spring protection (+2 feathers)

skimmers





Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
FRONT2	0.70 - 1.00	1000	70 - 105	2	0.56 - 0.8	30
FRONT3	1.05 - 1.50	1250	80 - 115	3	0.8 - 1.3	

The weight of the machine depends of the equipment

POL Light reversible plough

A - machine base	B2 - mandatory equipment
all working parts made from hardened boron steel	side wheel (depth wheel) 200/60 R14.5
shear bolt or semi-automatic protection against stones	
adjustable working width 30, 35, 40, 45 cm	
furrow closed-work or open-work	
underframe clearance: 76 cm	
frame-profil: 120x120 mm	
interbody clearance: 85 cm	
reversing cylinder	
plough shares 16" with cutters	



C - options

extension for furrow (2 pcs.)

share knife

disc coulters

skimmers

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
POL3	0.90 - 1.35	960	60 - 80	3	0.6 - 1.1	30
POL4	1.20 - 1.80	1100	80 - 100	4 or 3+1	0.8 - 1.5	

The weight of the machine depends of the equipment

POM Small reversible plough

A - machine base	B2 - mandatory equipment	C - options
all working parts made from hardened boron steel	side wheel (depth wheel) 175/70 R13	
shear bolt protection against stones		
adjustable working width: 25, 30, 35, 40 cm		
furrow closed-work		
underframe clearance: 70 cm		
frame-profil: 100x100 mm		
interbody clearance: 85 cm		
reversing cylinder		
plough shares 14" with cutters		

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
POM2	0.50 - 0.80	510	40 - 60	2	0.25 - 0.40	30
POM3	0.75 - 1.20	720	60 - 80	3	0.40 - 0.60	

The weight of the machine depends of the equipment

PJ Single beam plough

A - machine base	B1 - mandatory equipment	C - options
all working parts made from hardened boron steel		
furrow closed-work, furrow open-work or XL		
adjustable working width: 35, 40, 45, 50 cm		
frame-profil: 140x100 mm		
underframe clearance: 76 cm		
shear bolt or spring protection against stones		
plough shares 18" with cutters		
interbody clearance: 85 cm		

Model	Working width (M.)	shear bolt protection	spring protection	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
		Weight (kg)	Weight (kg)				
PJ3	0.96 - 1.32	605	805	60 - 80	3	0.72 - 0.96	25 - 30
PJ4	1.20 - 1.76	715	955	80 - 110	4 or 3+1	0.96 - 1.28	
PJ5	1.60 - 2.20	835	1035	110 - 150	5 or 4+1	1.20 - 1.60	

The weight of the machine depends of the equipment

PZ Bed plough

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- all working parts from hardened boron steel
- furrow closed-work
- working width 35 cm or 40 cm
- metal or rubber wheel
- interbody clearance 80 cm or 94 cm
- underframe clearance 65 cm or 68 cm
- plough shares (with cutters for Pz40)



Model	Working width 35 / 40 (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
PZ3	1.05 / 1.20	440	60 - 80	3	0.8 - 1.0	25 - 30
PZ4	1.40 / 1.60	540	80 - 100	4	1.0 - 1.2	
PZ5	1.75 / 2.00	640	100 - 120	5	1.2 - 1.4	

The weight of the machine depends of the equipment

PJM Small single beam plough

A - machine base	B1 - mandatory equipment	C - options
------------------	--------------------------	-------------

- all working parts made from hardened boron steel
- shear bolt protection against stones
- furrow closed-work
- adjustable working width: 30, 35, 40 cm
- frame-profil: 120x100 mm
- underframe clearance: 69 cm
- interbody clearance: 85 cm
- in standard plough shares 14" with cutters



extension for furrow




share knife

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of bodies (pcs.)	Performance (ha/h)	Working depth max (cm)
PJM2	0.6 - 0.8	380	20 - 40	2	0.42 - 0.65	25 - 30
PJM3	0.9 - 1.2	490	40 - 60	3	0.60 - 0.97	

The weight of the machine depends of the equipment

AP Stubble cultivator

A - machine base	B1 - mandatory equipment	C - options
automatic catch bar	roller (availability of rollers on the page 43)	
shear bolt protection or spring protection		
2 rows of tines		
row of concave discs 460 mm		




basic lights

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AP21	2.1	750	65 - 80	5	1.47 - 2.10	15
AP26	2.6	830	80 - 100	6	1.80 - 2.60	
AP30	3.0	915	100 - 140	7	2.10 - 3.00	

The weight of the machine depends of the equipment

AP PLUS Stubble cultivator

A - machine base	B1 - mandatory equipment	C - options
automatic catch bar	roller (availability of rollers on the page 43)	
spring protection		
2 rows of tines 35 x 35 mm		
row of concave discs 460 mm		
modern construction allows simultaneous adjustment of discs and roller		

hydraulic adjustment of working depth



basic lights

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AP21	2.1	760	65 - 80	5	1.47 - 2.10	15
AP26	2.6	860	80 - 100	6	1.80 - 2.60	
AP30	3.0	960	100 - 140	7	2.10 - 3.00	

The weight of the machine depends of the equipment

RUNO Stubble cultivator trailed


A - machine base

- three rows of tines with spring protection
- working parts for shallow work 80mm + cutters
- row of concave discs 460 mm
- roller made of tyres 185/65 15 with hydraulic adjustment of working



B1 - mandatory equipment

C - options

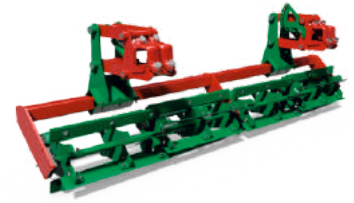

front cutting roller 380 mm with hydraulically adjustable working depth



hydraulic regulation of side discs

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
RUNO30	3.0	1850	110 -140	10	8	2.4	25

** The weight of the machine depends of the equipment.

RUNO SN Stubble cultivator trailed

A - machine base

- three rows of tines with spring protection
- working parts for shallow work 80mm + cutters
- row of concave discs 460 mm
- roller made of tyres 185/65 15 with hydraulic adjustment
- adaptor for connection with Sn300
- side screens



B1 - mandatory equipment

C - options



front cutting roller 380 mm with hydraulically adjustable working depth



set of hydraulic row markers

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
RUNO30	3.0	2560	140	10	6	2.4	25

** The weight of the machine depends of the equipment.

CUTTER Front Cutting Roller

A - machine base	B1 - mandatory equipment	C - options
two rows of cutting rollers 380 mm		
cover over rollers		




set of weights 500kg with holders




lights

Model	Working width (M.)	Weight (kg)	Power demand (HP)
CUTTER 30	3.0	770	100

** The weight of the machine depends of the equipment.

RUNNER Stubble cultivator


A - machine base	B1 - mandatory equipment (RUNNER50H)	C - options
three rows of tines with spring protection	drawbar CAT. 3 Type „I“,CAT. 2 i 3 Type "U",CAT. 4 Type "U"	set of coping wheels in the front 10.0/75 R15.3 (only for trailed version)
working parts for shallow work 80mm + cutters		harrow behind roller
row of concave discs 460 mm		platform with steps for SP230 (only for trailed version)
hydraulic regulation of roller (gradual or continuous)	trailed version for RUNNER50 2018 Version with drawbar ,wheel 400/60 R15.5,without spindle or wheel 500/50 R17 ,without spindle	holder for SP230 (only for hydraulic foldable version)
supporting racks (only for the hydraulically folded)		Holder for SP230 (only for trailed version)
	B2 - mandatory equipment	lights version 2022
	B3 - mandatory equipment	Lights (main handle + lights for hydraulically foldable version) 2022 version
	roller (availability of rollers on the page 43)	lights with fenders (only for trailed version) 2022 version
		hydraulic regulation of the side discs



Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	No. of discs (pcs.)	No. of discs (pcs.)	Working depth max (cm)
RUNNER25	2.5	1550	90 -110	7	6	2	30
RUNNER30	3.0	1850	110 -140	10	8	2.4	
RUNNER35	3.5	2150	150 - 210	12	9	2.8	
RUNNER40H	4.0	2600	190 - 250	13	10	3,2	
RUNNER50H	5.0	3000	250 - 300	16	12	4	

** The weight of the machine depends of the equipment


RUNNER X Semi-mounted stubble aggregate


A - machine basis	B1 - mandatory equipment	C - options	
hydraulically adjustable hitch height	ear fi40		
cultivation section with spring protection	ball K80		
working elements for shallow work, type 80 mm + undercutters	three-point attachment KAT3 and KAT4		
braking axis	B2 - mandatory equipment		
levelling disc section with discs 460 mm	pneumatic brakes		
hydraulically adjustable working depth	pneumatic-hydraulic brakes		
front copying wheels 10.0/75 r 15.3	B3 - mandatory equipment		
wheels 500/50 R17	roller (list of roller options on page 38)		basic lights
axle amortisation			



Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
RUNNER X4	4.0	4600	190 - 250	10 / 14	4.0 - 6.0	30
RUNNER X5	5.0	5100	280 - 400	12 / 18	5.0 - 7.0	30

GRIZZLY Multifunctional aggregate

A - machine base	B1 - mandatory equipment	C - options	
disc section with rubber protection 40 x 210 mm	ear fi40		
two rows of discs 510 x 4 mm type "C"	ball K80		
maintenance-free hubs with cartridge seals	B2 - mandatory equipment		
distance between rows of discs 80 cm	pneumatic brakes		
cultivation section with spring protection	pneumatic-hydraulic brakes		
levelling disc section with discs 460 mm	B3 - mandatory equipment		
hydraulically adjustable working depth on the roller	roller (list of roller availability on page 43)		basic lights
wheels 500/50 R17			
axle amortisation			

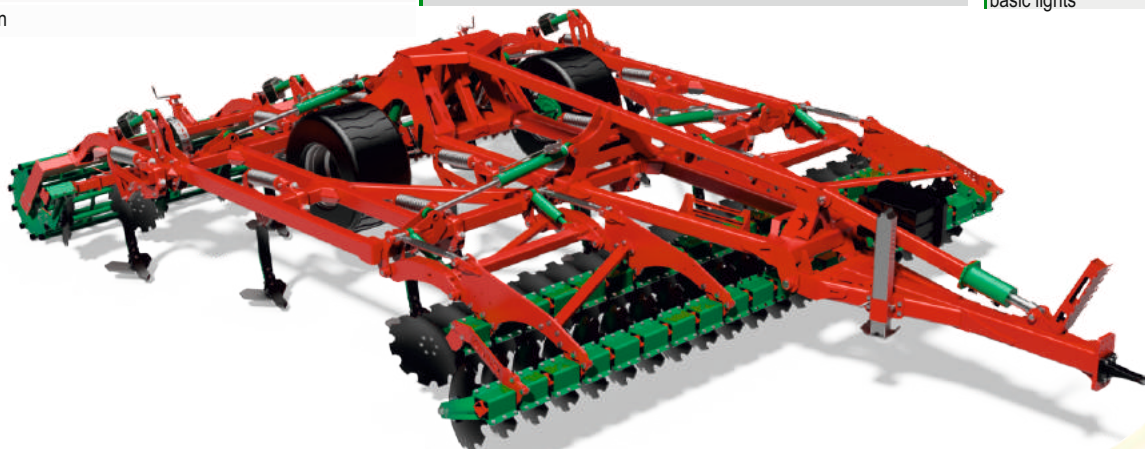

Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of tines (pcs.)	No. of discs (pcs)	Performance (ha/h)	Working depth max (cm)
GRIZZLY X4	4.0	5800	350	10 / 14	30 / 32	4.0 - 6.0	30
GRIZZLY X5	5.0	6300	400	12 / 18	38 / 40	5.0 - 7.0	

** Weight depends on equipment.

AP AgregatStubble cultivator

A - machine base	B1 - mandatory equipment	C - options
spring protection or hydraulic protection	roller (availability of rollers on the page 43)	
3 rows of tines 60 x 25 mm		
row of leveling springs 60 x 10 mm		
working parts for deep work 40 mm with cutters or for shallow work 80 mm with cutters		



hydraulic adjustment of working depth




basic lights

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AP30	3.0	1400	130 - 160	10	2.1 - 3.0	4 - 30

** The weight of the machine depends of the equipment.

AP Stubble cultivator with NON-STOP protection

A - machine base	B1 - mandatory equipment	C - options
spring protection	roller (availability of rollers on the page 43)	
2 rows of tines 60 x 25 mm		
row of concave discs 460 mm mounted on springs		

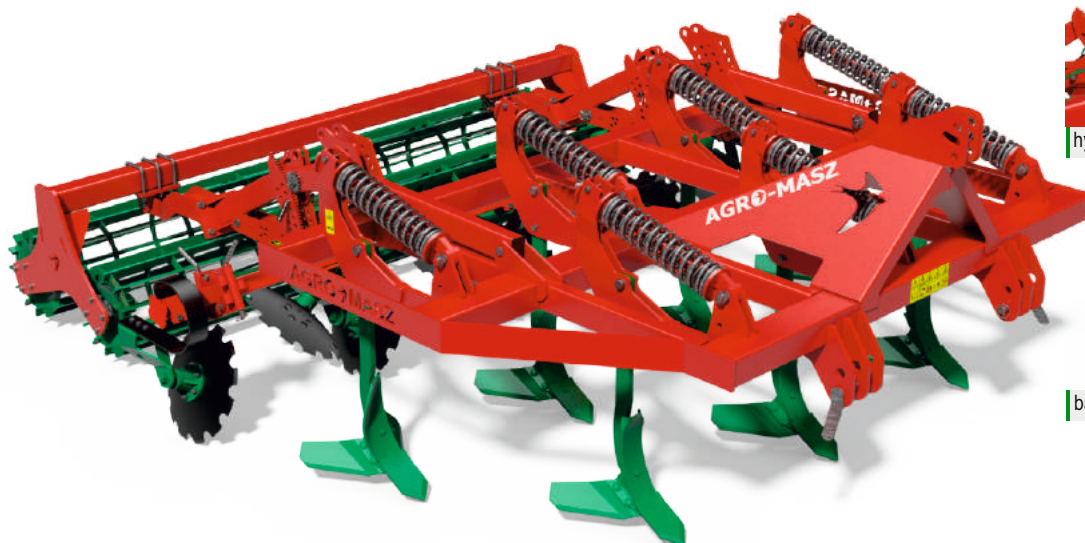

hydraulic adjustment of working depth



basic lights

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
AP21	2.1	1050	80 - 100	5	1.47 - 2.10	4 - 13
AP26	2.6	1200	100 - 120	6	1.80 - 2.60	
AP30	3.0	1400	110 - 140	7	2.10 - 3.00	

** The weight of the machine depends of the equipment.

VIBRO Universal cultivator

A - machine base	B1 - mandatory equipment	C - options
4 rows of tines 70 x 12 mm straight coulter 60 mm or cultivator point 200 mm hydraulically folding	roller (availability of rollers on the page 43)	



basic lights



depth wheels



leveling slat in fourth row of tines



harrow hydraulically or manually adjustable




fertilizer spreading head with wires and nozzles on the teeth (without transport between the seeder and the head)

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
VIBRO40	4.0	1800	80	33/25	4.0 - 4.8	4 - 13
VIBRO50	5.0	2100	120	41/33	5.0 - 6.0	
VIBRO60	6.0	2400	160	49/41	6.0 - 7.2	

The weight of the machine depends of the equipment

VIBRO Universal cultivator

A - machine base	B1 - mandatory equipment	C - options
4 rows of tines 70 x 12 mm straight coulter 60 mm or cultivator point 200 mm hydraulically folding transport wheels 500/50 r17	roller (availability of rollers on the page 43)	

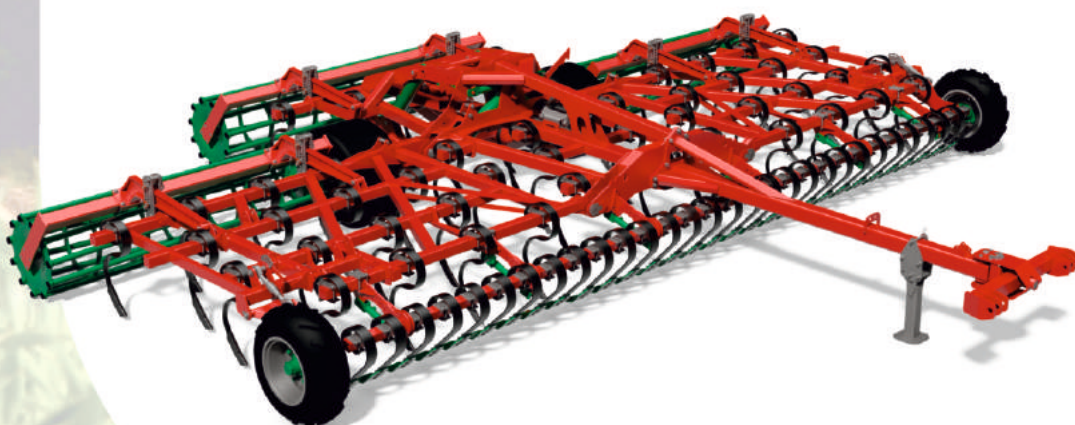

basic lights



row of spring tines behind the roller




front harrow hydraulically adjustable made of springs 80 x 10

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
VIBRO65	6.5	4300	160 - 220	41	6.5 - 7.8	4 - 13
VIBRO80	8.0	5000	220 - 280	49	8.0 - 9.6	

The weight of the machine depends of the equipment

APS Universal cultivator

A - Universal cultivator	B1 - mandatory equipment	C - options
4 rows of tines 70 x 12 mm straight coulter 60 mm or cultivator point 180 mm	roller (availability of rollers on the page 43)	
hydraulically folding (APS40H, APS50H, APS60H)		

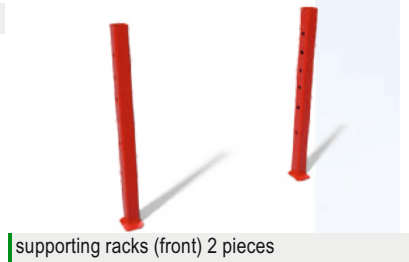

supporting racks (front) 2 pieces



basic lights
lights with adjustable handle



hydraulic adjustment of working depth



row of spring tines

Model	Working width (M.)	Weight (kg)	Power demand (HP)	No. of tines (pcs.)	Performance (ha/h)	Working depth max (cm)
APS30	3.0	1000	65 - 80	18	2.0 - 4.0	4 - 13
APS40	4.0	1350	80 - 100	24	2.9 - 5.0	
APS40H	4.0	1420	110 - 130	24	2.9 - 5.0	
APS50H	5.0	1620	130 - 150	30	3.6 - 6.2	
APS60H	6.0	1840	150 - 175	36	4.5 - 7.5	


**The weight of the machine depends of the equipment.

REWO Lime and fertiliser spreader

A - machine base	B1 i B2 - mandatory equipment	C - options
conveyor belt with anti-chamfering safety protection and tensioner	ear hitching end fi 40 mm	upper hook
powder painting or stainless steel tank	ball hitching end K80	lower hook
mechanical drive of conveyor belt - transmission from wheel	B3 - mandatory equipment	
mechanical drive of spreading discs (from tractor's WOM)	single slider (one actuator)	
mechanical regulated support bar	divided slider (four actuators)	
pneumatic brakes	B4 - mandatory equipment	
road lights	adapter + lime spreading discs	border sowing, right side (only for version with divided slider)
foot platform with	adapter + fertiliser spreading discs (14-24 m.)	
tyres 18.4-34		



border sowing, right side (only for version with divided slider)

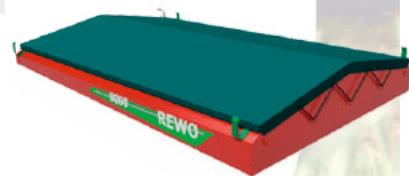


plastic protective cover

Model	Box capacity (l)	Working width (M.)	Weight (kg)	Power demand (HP)	Maximum total weight (kg)
REWO 8200	8200	8 - 24	3200	100 - 130	12000

**The weight of the machine depends of the equipment.

FALCON Pneumatic corn seeder

A - machine base	B1 - mandatory equipment	C - options	
double-disc sowing section (disc Ø 390 mm) mechanically operated	depth wheels from sowing section 400 x 115		
vacuum's fan drive from WOM and seeding on the basis of vacuum	B2 - mandatory equipment		
vacuum gauge	burnishing wheels from sowing section 310 x 25		
seed box 50l	burnishing wheels from sowing section 325 x 50		
vacuum gauge for measuring pressure	B3 - mandatory equipment		
lights	computer AD40 basic version		
	computer AD40 - version with wiring adapted for sowing microgranules	hydraulic marker with hydraulic protection	



fertilizer hopper 1200L + coulters for fertilizer sowing, double-disc




set for sowing microgranulate (16l box for 1 coulters); requires AD40 computer with microgranulate control

Model	Transport width (M.)	Frame's type	No. of rows (pcs)	Weight (kg)	Power demand (HP)	Width between rows (M.)
FALCON3	3	Fixed/Hard	4	1500	100-130	45 - 80
FALCON3+	3.3	Telescopic	6	1820	130-150	45 - 80

**The weight of the machine depends of the equipment

FALCON-E Pneumatic corn seeder

COMING SOON!

A - machine base	B1 - mandatory equipment	C - options	
double-disc sowing section (disc Ø 390 mm) electrically-operated	depth wheels from sowing section 400 x 115		
vacuum's fan drive from WOM and seeding on the basis of vacuum	B2 - - mandatory equipment		
vacuum gauge	burnishing wheels from sowing section 310 x 25		
seed box 50l	burnishing wheels from sowing section 325 x 50		
vacuum gauge for measuring pressure	B3 - - mandatory equipment		
Lights	computer AD40 basic version		
	computer AD40 - version with wiring adapted for sowing microgranules	hydraulic marker with hydraulic protection	



set for sowing microgranulate (16l box for 1 coulters); requires AD40 computer with microgranulate control

fertilizer distribution head + double-disc coulters for sowing fertilizer

Model	Transport width (M.)	No. of rows (pcs)	Weight (kg)	Power demand (HP)	Width between rows (M.)
FALCON - E 8	3	8	2400	160-230	75

**The weight of the machine depends of the equipment.

SALVIS Pneumatic seeder

NEW!

A - machine base
capacity 3800 l (2050 l seed box, 1750 l fertiliser box)
pneumatic fan driven by hydraulic motor
electric drive of the sowing units
spreading management by computer
front tyre roller
maintenance free hubs
adjustment roller
infinitely variable hydraulic coulters pressure
tightly closed fertiliser and seed box
fertiliser hopper and spreading unit made of acid resistant steel



B1 - mandatory equipment

hitch spindle 3 cat. Typ "I"

B2 - mandatory equipment

cultivation section with spring protection

cultivation section with hydraulic protection

B3 - mandatory equipment

Set of 18 double disc coulters 343 x 2.5mm with 315 x 50mm

Set of 4 coulters for spot sowing, seed hopper 50 l, 400 x 115 seeding unit copying wheels, 325 x 25 seeding unit press wheels

Set of 4 coulters for spot sowing, seed hopper 50 l, 400 x 115 seeding unit copying wheels, 325 x 50 seeding unit press wheels

Set of 6 coulters for spot sowing, seed hopper 50 l, 400 x 115 seeding unit copying wheels, 310 x 50 seeding unit press wheels

Set of 6 coulters for spot sowing, seed hopper 50 l, 400 x 115 seeding unit copying wheels, 325 x 50 seeding unit press wheels

B4 - mandatory equipment

Miller computer (sufficient when the tractor has ISOBUS)

B5 - mandatory equipment

half sowing mechanism : mechanical

half sowing mechanism : electrical

C - ISOBUS equipment: when the tractor has an ISOBUS connection but without terminal

Touch 800 + RS232-CPC cable

Smart 570

Smart 430 + M12-CPC cable

C - ISOBUS equipment: when the tractor does not have an ISOBUS connection and terminal

Touch 800 + ISOBUS bundle


Smart 570 + ISOBUS bundle

Smart 430 + ISOBUS bundle + M12-CPC cable

C - options



front wheels cleaner

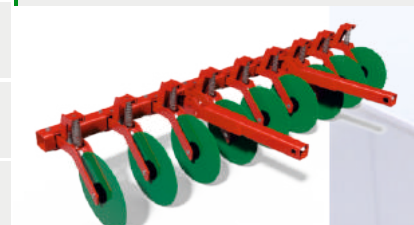


set of cutting discs 9 pcs.



set of cutting discs 9 pcs.



electrically switched tramlines

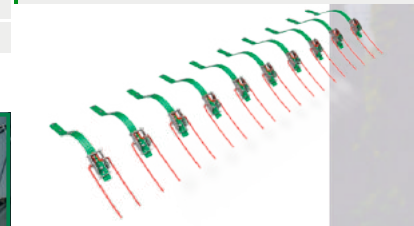

set of 18pcs coulters harrow (9 pcs double + 9 pcs single) (for the set of 18 pcs double coulters)

additional hopper 230 liters for sowing small seeds

adapter for sowing micro granules





roller for sowing microgranules

sowing distributors (microgranulate 9 sections)

Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of tines (pcs.)	No. of coulters (pcs.)	Performance (ha/h)	Working depth max (cm)
Salvis Z 3000	3	5200	200-280	9	18	1,5 - 3	30

** Weight depends on equipment.

SR Mechanical seed drill

A - machine base	B1 - mandatory equipment	C - options
2 rows of disc coulters		tramline system:
2 or 3 rows of hoe coulters		
hydraulic disc markers system		mechanical
central pressure adjustment of coulters		
loading platform		electrical tramline system (AM+ driver, simplified manual)
divided seed wheels		
lights		electrical tramline system (on/off)
seed divider		



hoe coulters	disc coulters (single disc with depth wheel)	disc coulters with a flexible cleaning disc and depth wheel	two-disc coulters (double disc coulters with depth wheel)
--------------	--	---	---

- computer
- *advanced sensor of level of seeds (option for tramline system with computer)
- tractor trace cultivators (2 or 4 pcs.)
- rear markers (available only for electrical tramlines system or electrical tramlines system with computer)
- hooper extension 275 l (available only for Sr300)
- lower or upper hitch extension (2 pcs)
- cable extension for electric or computer tramline system (4 meters)
- extension cable 4m for hydraulic disc makers
- inside hooper LED light

Model	Working width (M.)	Weight (kg)			No. of coulters (pcs.)	Power demand (HP)	Box capacity (l)
		hoe coulters	disc coulters (single disc/cleaning disc)	two-disc coulters			
SR250	2.5	580	720	750	19 / 21	40 - 60	450
SR270	2.7	600	800	835	23	50 - 70	480
SR300	3.0	620	820	860	23 / 25	60 - 80	550
SR350	3.5	760	940	980	29	70 - 90	640
SR400	4.0	860	1020	1070	33	80 - 100	790

The weight of the machine depends on the equipment

SN 300 Mechanical seed drill for cultivators

A - machine base	B1 - mandatory equipment	C - options
hoe coulters, single (standard), single with rubber cleaning or double disc coulters with depth wheels		tramline system:
hooper capacity 700 l		
central pressure adjustment of coulters		mechanical
loading platform		
divided seed wheels		electrical (AM+ driver, simplified manual)
lights		
seed divider		electrical (on/off)



Model	Width (m)	Weight (kg)	No. of coulters (pcs)
SN300	3.0	1000	24

Cultivators for SN300

ANU30 A - machine base	C - options
2 rows of tines 45x10 mm	set of hydraulic markers
side screens	leveling slat (for version with 2 rows of tines 45x10 mm)
	leveling slat (for version with 2 rows of tines 45x10 mm)

ANT30 A - machine base	C - options
2 rows of discs 460 mm or 510 mm type „C“	set of hydraulic markers
side screens	hydraulic adjustment of working depth
double arm of disc holder	

ANA30 A - machine base	C - options
row of spinning knives	set of hydraulic markers
side screens on spring handle	hydraulic adjustment of working depth
	power transmission shaft (WOM)
	hydropack for SR300


electrical (on/off)



computer
* advanced sensor of level of seeds (option for tramline system with computer)





leveling slat (for ANU30)



rear markers (available only for electrical tramlines system or electrical tramlines system with computer)

inside hooper LED light

supporting racks (2 pcs)

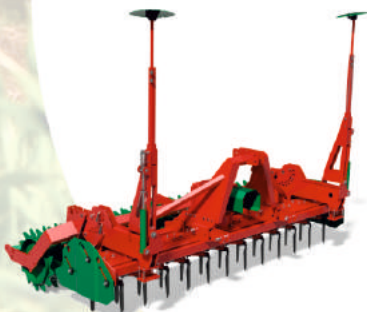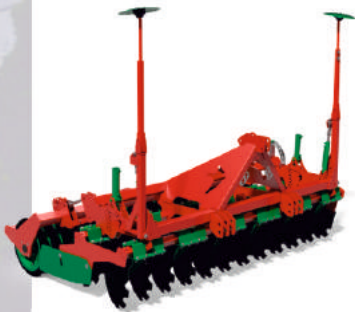


Model	Working width (M.)	Weight (kg)	No. of tines (pcs.)	No. of discs (pcs.)	No. of knives (pcs.)	Power demand (HP)	Performance (ha/h)
SN300 + ANU30	3.0	1700	20	-	-	100 - 150	2.7
SN300 + ANT30		2150	-	24	-	130 - 180	
SN300 + ANA30		2060	-	-	24	100 - 250	


The weight of the machine depends of the equipment

SP Aftercrop seeder


A - machine base	B1 - mandatory equipment	C - options
speed signal taken from the depth wheel		fan speed regulation
speed signal retrieved from GPS		
speed signal taken from the depth wheel + hydraulic ventilator		
speed signal retrieved from GPS + hydraulic ventilator		
speed signal taken from the copying wheel, computer AD2+ (fan speed regulation included)		
speed signal taken from GPS, computer AD2+ (fan speed regulation included)		

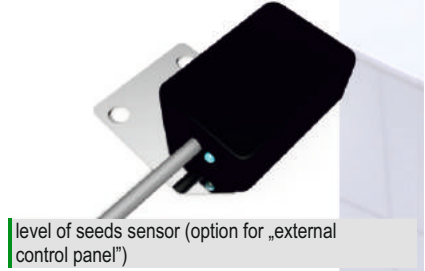

- single flat step
- double flat step
- step 45°
- step 90°
- double step VIBRO 40/50/60
- triple step 1/2 VIBRO 40/50/60
- triple step 0/3 VIBRO 40/50/60

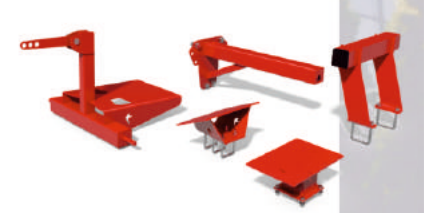


- assembly chassis for BTH in trailed version
- assembly chassis for BTH 2018 version
- assembly chassis for BT27, Bt30
- assembly chassis for BTC30
- assembly chassis for BTC50, BTC60
- assembly chassis for BM
- assembly chassis for AT
- assembly chassis for APN26
- assembly chassis for AP, APN21, APN30
- assembly chassis for APR
- assembly chassis for APS
- assembly chassis for GRASS 300
- assembly chassis for VIBRO 40/50/60
- set of seeding limiters
- depth wheel's handle for Bm75



Model	No. of sections (pcs.)	Weight (kg)	Power demand (HP)	Working width (M.)	Box capacity (l)
SP 230	8	65	-	2 - 6	230
SP 400	8	100	-	2 - 6	400

The weight of the machine depends of the equipment

AQUILA Pneumatic grain seeder with disc aggregate

A - machine base	B1 - mandatory equipment	C - options
two rows of discs 410x5mm with hydraulically adjustable working dept	roller (availability of rollers on the page 38)	 touch terminal Touch800 with wiring
seeder equipped with hopper 1500l	B2 - mandatory equipment	
electrically driven	Miller computer (sufficient when the tractor has ISOBUS)	
B3 - mandatory equipment		
hydraulic coulters pressure	half sowing mechanism : mechanical	
hydraulic coulters depth adjustment	half sowing mechanism : electrical	
double-disc coulters disc Ø 343mm		
copying wheel Ø 330mm		




set of hydraulic markers



lights



electrical tramlines system



set of double coulters harrows



Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of discs (pcs.)	No. of blades (pcs.)	Performance (ha/h)	Working depth max (cm)	Capacity (l)
AQUILA DISC COMPACT 1500	3.0	2800	150 -180	24	-	5.4	15	1500
AQUILA ACTIVE COMPACT 1500	3.0	2800	150 -180	-	24	3.0	10	1500

The weight of the machine depends of the equipment


AQUILA DRIVE

Pneumatic grain seeder with disc aggregate


NEW!

A - machine base	B1 - mandatory equipment
two rows of discs 460x5mm with hydraulically adjustable working dept	hitch cat. 3 type
seeder equipped with hopper 2800l	hitch cat. 2 + cat.3 type "U"
pneumatic blower driven by a hydraulic motor	hitch cat. 4 type "U"
electric drive of the seeds distribution unit	hitch cat. 3 type "U" with press wheels (10/75 r15.3")
tyre roller	
lights	
the flash lamp	
hydraulic coulters pressure	
mechanical coulters depth adjustment	
double-disc coulters disc Ø 343mm	
copying wheel Ø 330mm	
	B2 - mandatory equipment
	Miller computer (sufficient when the tractor has ISOBUS)
	B3 - mandatory equipment
	half sowing mechanism : mechanical
	half sowing mechanism : electrical
	B3 - mandatory equipment
	hydraulic installation: basic


C - options



set of hydraulic markers



electrical tramlines system

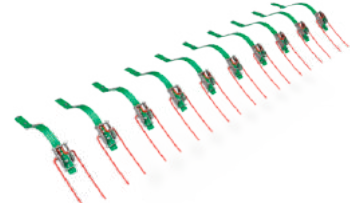set of double coulters harrows

seed flow measurement system

hydraulically adjustable front levelling board

Set of 4 pcs. of tractor trace

pre-emergence paths (rear)

C - ISOBUS equipment: when the tractor has an ISOBUS connection but without terminal

Touch 800 + cabel RS232-CPC

Smart 570

Smart 430 + cabel M12/ CPC

C - ISOBUS equipment: when the tractor does not have an ISOBUS connection and terminal

Touch 800 + ISOBUS bundle

Smart 570 + ISOBUS bundle

Smart 430 + ISOBUS bundle + M12-CPC cable




Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)	Capacity (l)
AQUILA DRIVE 300	3.0	4800	150 -180	24	5.4	15	2800
AQUILA DRIVE 400	4.0	5820	180 -240	32	7.2	15	2800

** The weight of the machine depends of the equipment.

IKAR Pneumatic seed drill (front)

NEW!

A - machine base	B1 - mandatory equipment	C - options
seeder equipped with a box 1800 l	front hitch	
electrically driven device	front hitch with 10/75 r15.3" steerable press wheels	
pneumatic seed transport		
hydraulic blower		
lights		set of weights 250 kg (only for the front hitch version with press wheels 10/75 R15.3")
	B2 - mandatory equipment	C - ISOBUS equipment: when the tractor has an ISOBUS connection but without terminal
	transport adapter version 1	
	B3 - mandatory equipment	C - ISOBUS equipment: when the tractor does not have an ISOBUS connection and terminal
	fertiliser head for 10 coulters, set of sowing nozzles and holder for the RUNNER 30 fertiliser head for 16 coulters, set of sowing nozzles and holder for Runner 50	
	B4 - mandatory equipment	Touch 800 + cabel RS232-CPC Smart 570 Smart 430 + cabel M12/ CPC
	Miller computer (sufficient if the tractor has ISOBUS)	
		C - ISOBUS equipment: when the tractor does not have an ISOBUS connection and terminal Touch 800 + ISOBUS bundle Smart 570 + ISOBUS bundle Smart 430 + ISOBUS bundle + M12-CPC cable



IKAR + RUNNER - set for simultaneous cultivation and soil fertilisation

Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of discs (pcs.)	No. of blades (pcs)	Performance (ha/h)	Working depth max (cm)
IKAR + AQUILA DISC	3.0	2800	150 -180	24	-	5.4	10
IKAR + AQUILA ACTIVE	3.0	2800	150 -180	-	24	3.0	10

** Weight depends on equipment.

AQUILA DISC Superstructure disc harrow

A - machine base	B1 - mandatory equipment
2 rows of discs 410 x 5 mm type „C”	roller (list of roller availability on page 43)
side screense	B1 - mandatory equipment
sowing head for grain	Miler computer (sufficient if the
hydraulic coulter pressure	B1 - mandatory equipment
hydraulic coulter depth adjustment	Mechanical half-sowing system
	Electric half-sowing system


C - options



- electrical tramlines system
- seed flow measurement system (for a set of 20 double-disc coulters)
- seed flow measurement system (for a set of 24 double-disc coulters)



set of hydraulic markers

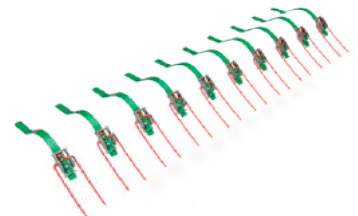

set of double coulter harrows



Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
IKAR + AQUILA DISC	3.0	2800	150 -180	24	5.4	10

** The weight of the machine depends of the equipment.

AQUILA ACTIVE Superstructure power harrow

A - machine base	B1 - mandatory equipment
rotating blades	roller (list of roller availability on page 43)
side screens on spring holders	B1 - mandatory equipment
sowing head for grain	Miler computer (sufficient if the tractor
hydraulic coulter pressure	B1 - mandatory equipment
hydraulic coulter depth adjustment	Mechanical half-sowing system
	Electric half-sowing system


C - options



- electrical tramlines system
- seed flow measurement system (for a set of 20 double-disc coulters)
- seed flow measurement system (for a set of 24 double-disc coulters)



set of hydraulic markers

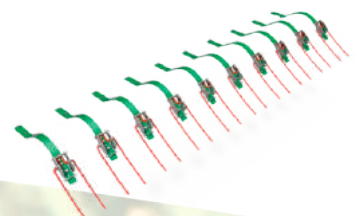

set of double coulter harrows



Model	Width (M.)	Weight ** (kg)	Power (HP)	No. of discs (pcs.)	Performance (ha/h)	Working depth max (cm)
IKAR + AQUILA ACTIVE	3.0	2800	150 -180	24	3.0	10

** Waga zależy od wyposażenia.

Dzik Seeder for buffer strips

A - machine base	B1 - mandatory equipment	C - options
electrical drive		
seed dividers		
6 seeding pipes		
working width max. 2 m		
random seeds spreading		



Model	Weight (kg)	Working width (M.)	Box capacity (l)
DZIK	70	1.5 - 2	260

AD Slurry distributor


A - machine base	B1 - mandatory equipment	C - options
diameter of distributor 600 mm		
diameter of tubes 42 mm		
hydraulic motor		
set of tubes distributing manure with application nozzles		
galvanized		



assembly chassis for BTH

Model	Working width (M.)	Weight (kg)	No. of exits (pcs.)
AD12	0.6	120	12
AD24	0.6	120	24

ROLLERS

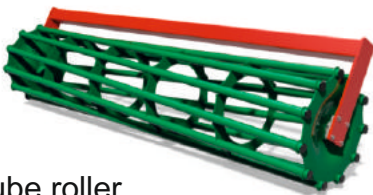


Tube roller



Rubber roller




Cage roller smoothed

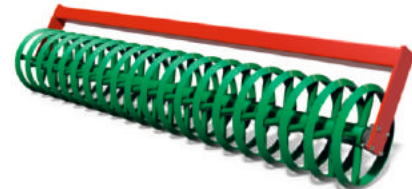


V-ring roller



Cage roller toothed

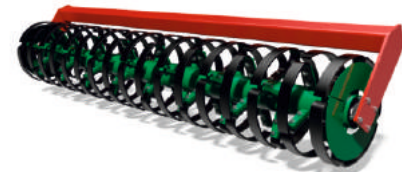


Flexi ring roller

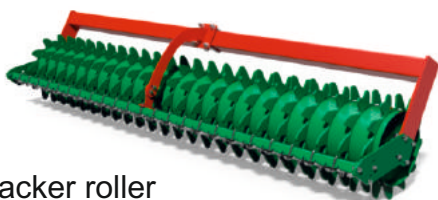

Packer roller




Double crosskill roller

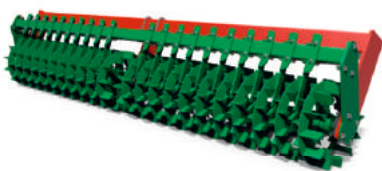

Crosskill roller



Double roller (cage roller + tube roller)

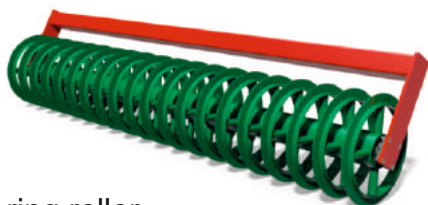

T-ring roller



Double C-profil roller



Prismatic roller



Cracker roller



Trapezoidal roller



Rubber roller version 2020

ROLLERS - SUMMARY

MACHINE	AT	AS	GRASS	AUC	APS	VIBRO	AP	AP	AP	AP PLUS	RUNNER	BT 15 - 20	BTL	BT	COLT	BTC	GRIZZLY	TROL	AN	AQUILA	HESTILE	
TUBE Ø 400																						
TUBE Ø 440																						
TUBE Ø 500																						
TUBE Ø 600																						
RING Ø 500																						
RING Ø 600																						
PACKER Ø 400																						
PACKER Ø 500																						
PACKER Ø 560																						
CROSSKILL Ø 400																						
V-RING Ø 500																						
V-RING Ø 600																						
T-RING Ø 500																						
T-RING Ø 600																						
STRING Ø 320																						
STRING Ø 400																						
RUBBER Ø 500																						
CRACKER Ø 600																						
PRISMATIC Ø 500																						
T-RING Ø 560																						
RUBBER 2020 Ø 560																						
CAMBRIDGE Ø 500 / 53																						
CAMBRIDGE Ø 590 / 60																						
TANDEM 2X Ø 400																						
(2X C-RING)																						
TANDEM 2X Ø 500																						
(2X C-RING)																						
TANDEM 2X Ø 400 / 500																						
(STRING + TUBE)																						
TANDEM 2X Ø 400 / 400																						
(STRING + TUBE)																						
TANDEM 2X Ø 500 / 400																						
(TUBE + TUBE)																						

V-ring and T-ring rollers available without cleaners (standard). Cleaners are available for an additional payment.

AGRO [®]

MASZ

Modern Farming


AGRO-MASZ Agriculture

Strzelce Małe 78
97-515 Masłowice


Export

tel. +48 605 724 854


export@agro-masz.eu

tel. +48 661 027 679 

rafal.kornatka@agro-masz.eu

+48 789 260 918 

marek.jonczyk@agro-masz.eu

tel. +48 603 676 644 

mariusz.gleda@agro-masz.eu

Dealer details

www.agro-masz.eu